


4 CORE ALARM CABLE

MODEL: 7/0.20

Full Tinned Copper Alarm Cable

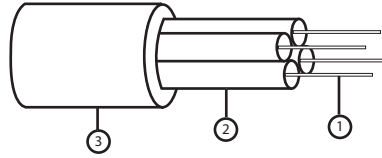

- ① Tinned Copper 7 x 0.20mm
- ② PVC TI-I 0.32m
- ③ PVC White 0.63m

Specification

1. Material 1.1. Conductor 1.2. Insulation 1.3. Sheath	Stranded Tinned copper wire PVC type TI-I PVC type TI-I
2. Construction 2.1. Conductor 2.1.1. Number of copper wires 2.1.2. Diameter of single Copper wire 2.2. Insulation 2.2.1. Thickness of insulation 2.2.2. Diameter of insulation 2.2.3. Color of insulation 2.3. Sheath 2.3.1. Thickness of sheath 2.3.2. Color of sheath	7 0.20mm ± 0.005mm 0.29mm ± 0.03mm 1.18mm ± 0.05mm Red, White, Green & Black 0.68mm ± 0.05mm as request
3. Overall diameter of complete cable	4.25mm ± 0.15mm
4. Overall diameter of complete cable	70°C
5. Voltage	50V r.m.s
6. Conductor Resistance (Max.)	92 Ohm/km